



Performance Curves

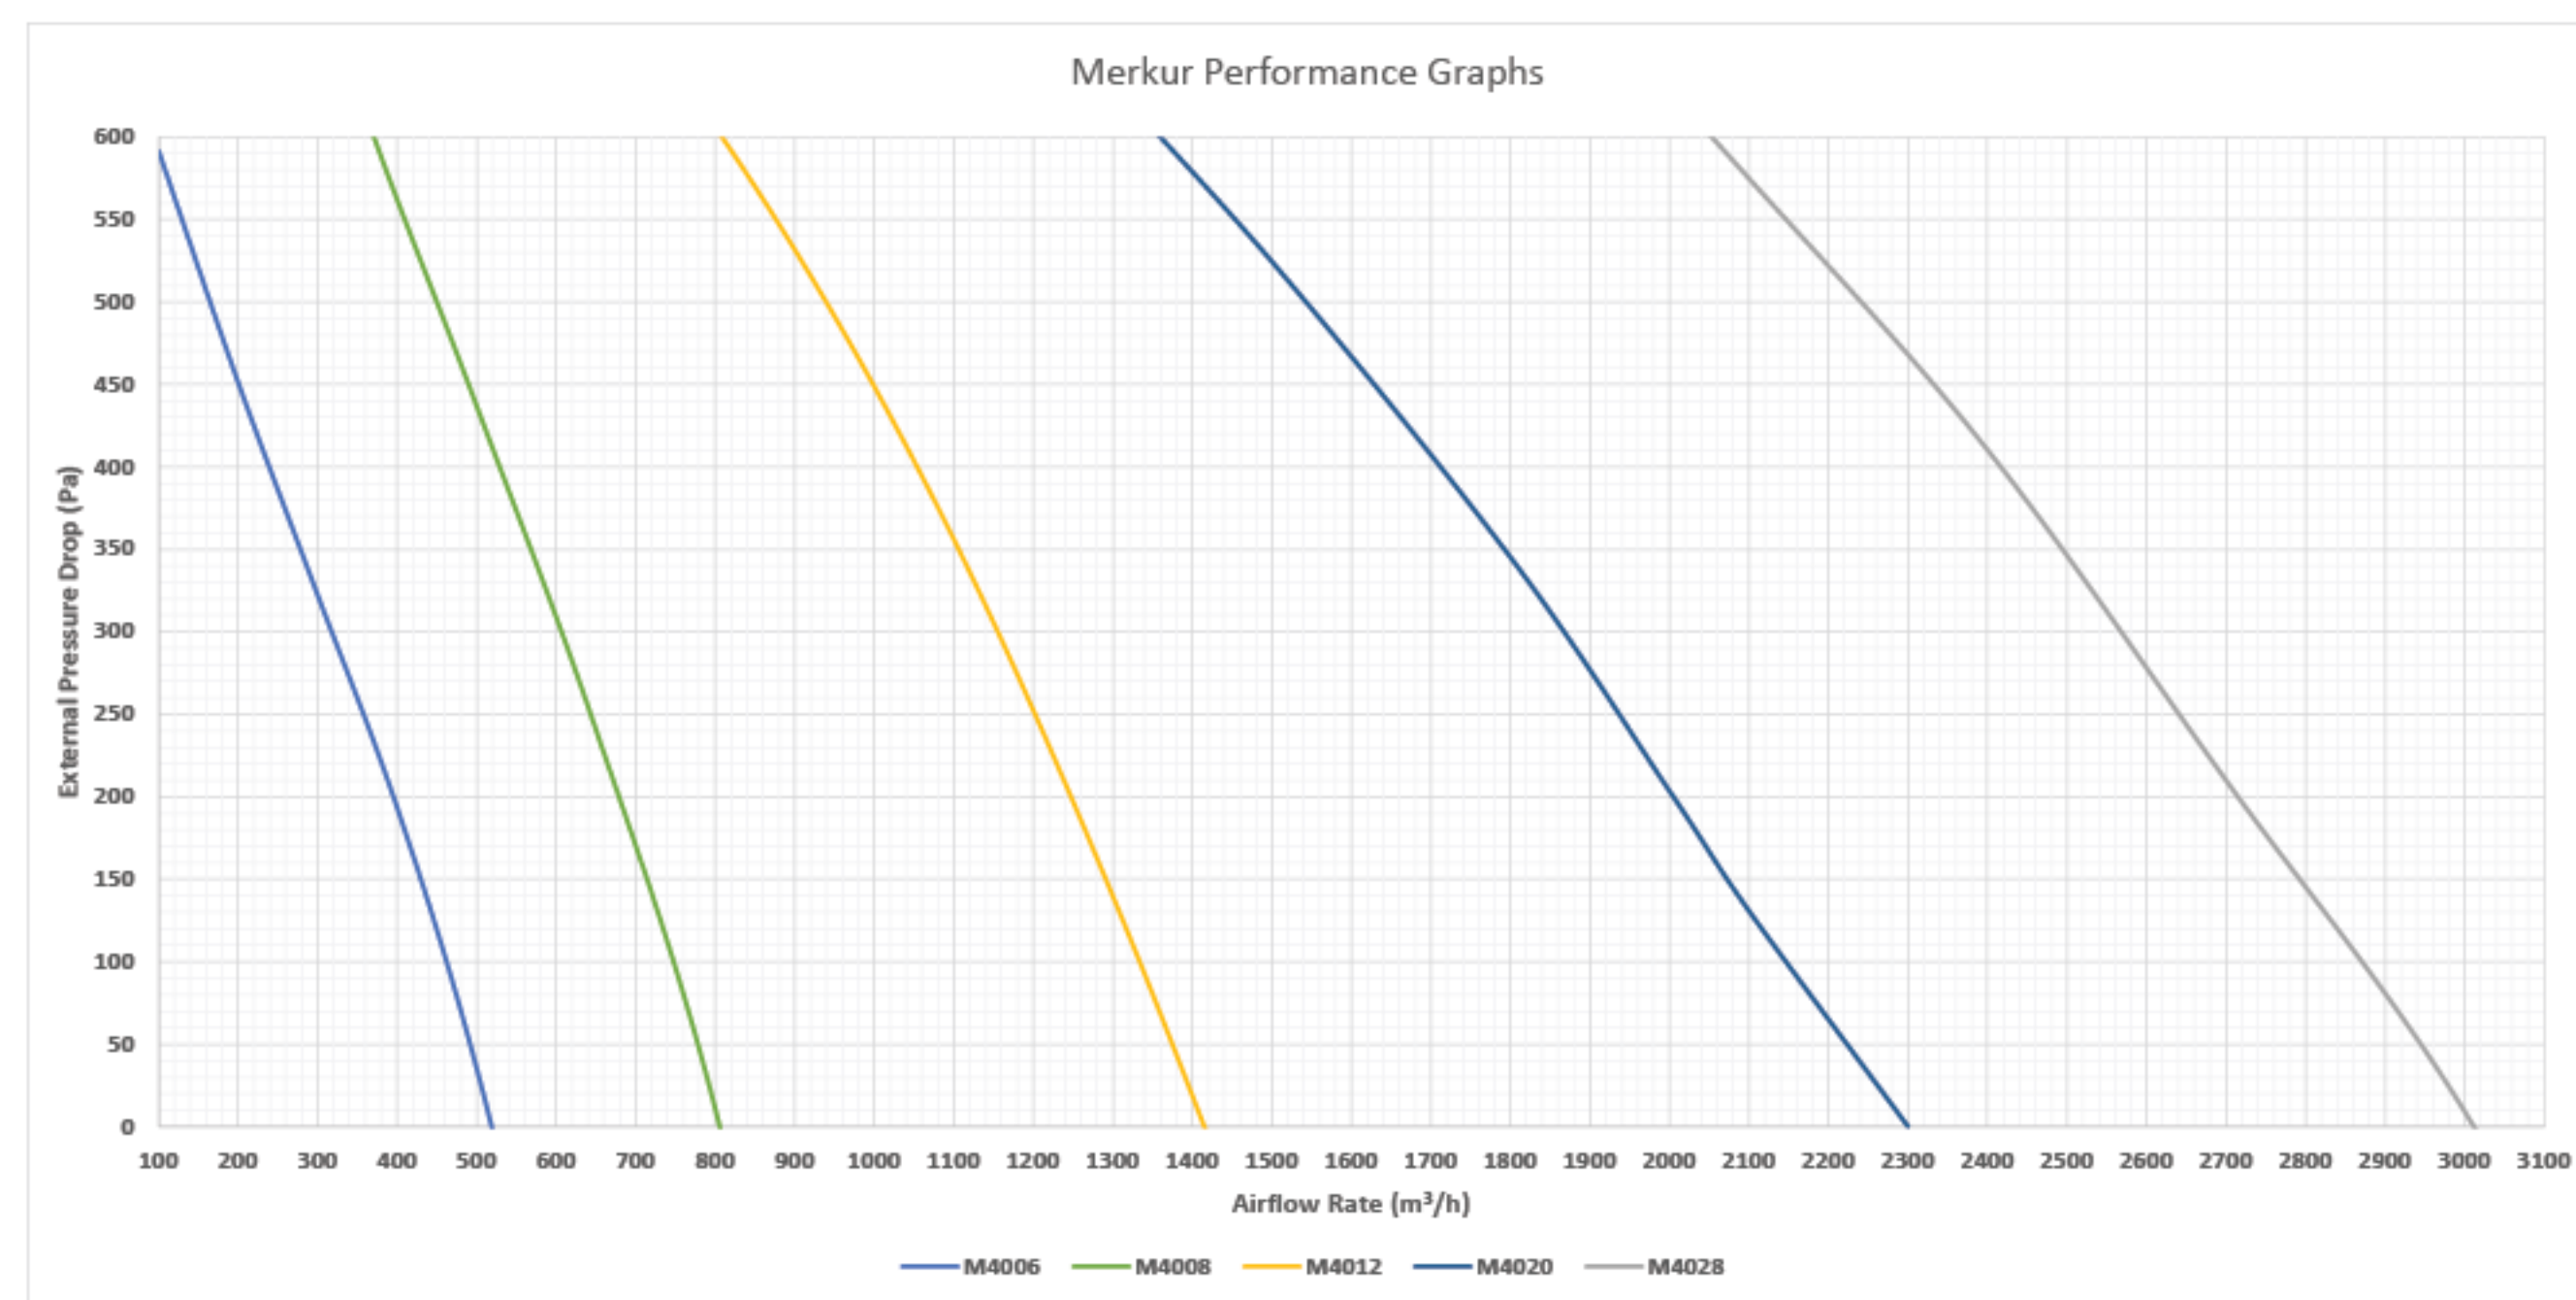


Mercur Dimensions


Top View

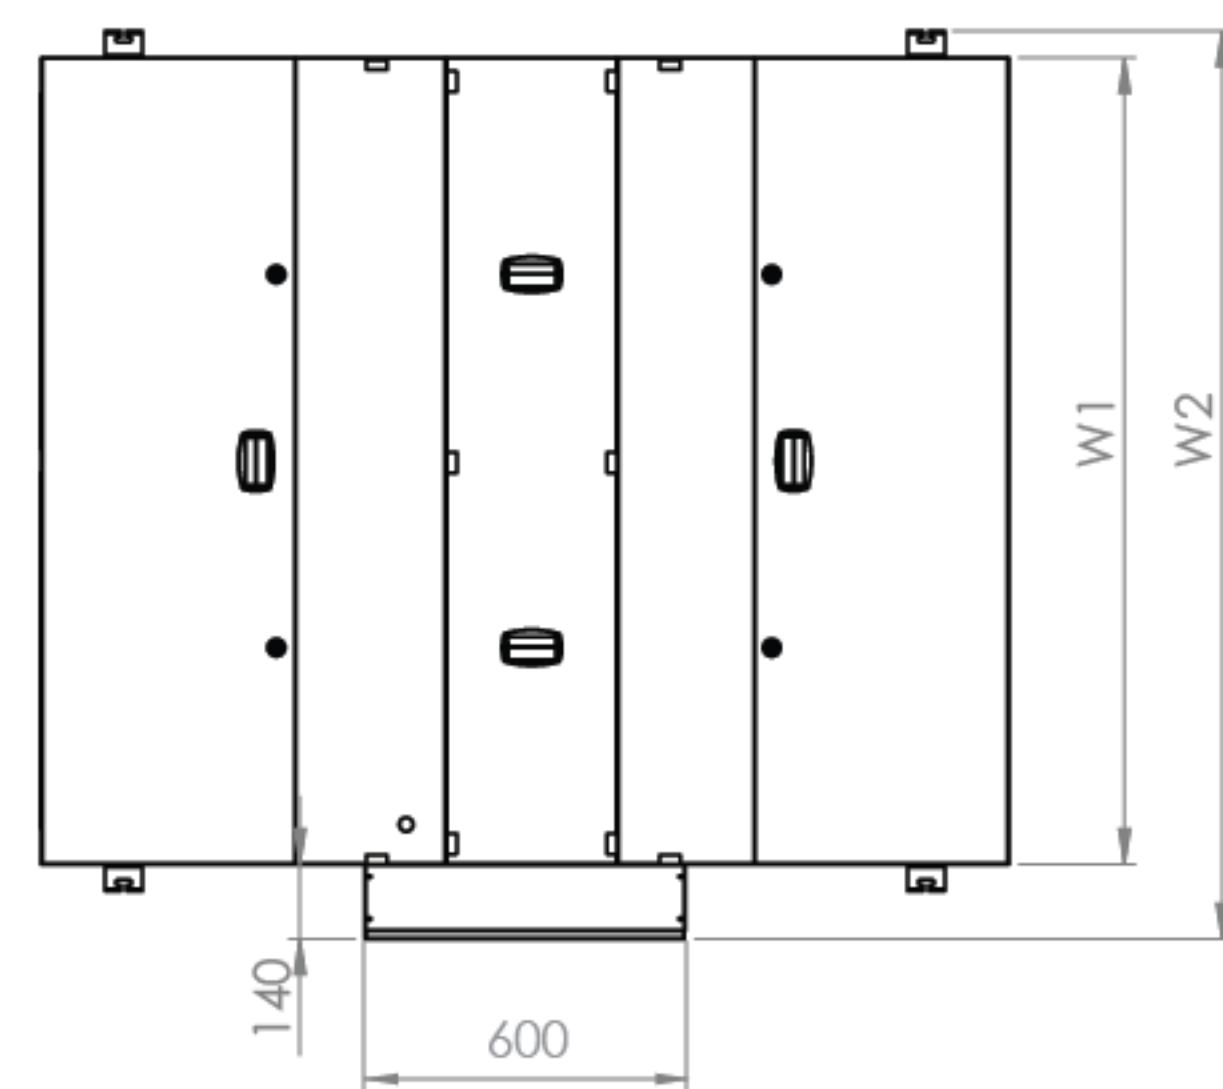

Left View

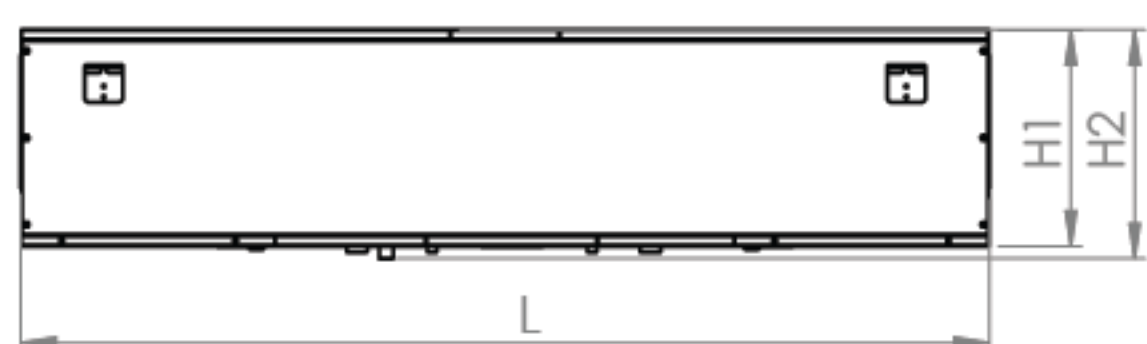

Right View

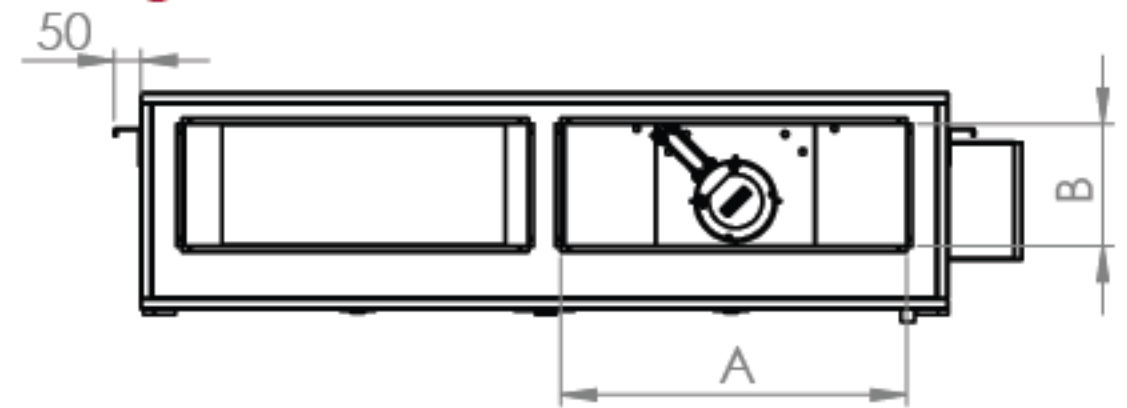

	L	H1	H2	W1	W2	AxB
M4006	1335	324	349	813	1003	300X150
M4008	1335	324	349	1118	1308	370X150
M4012	1425	365	390	1213	1403	500X200
M4020	1816,6	406	431	1513	1703	650X230
M4028	1898,6	488	513	1863	2053	700X290



airtradecentre.com



Product Leaflet
MERKUR RANGE

Mercur Leaflet



ATC General Catalog




ATC Product Videos



- Compliant with ErP2018
- Plug & Play
- Especially designed for low-height applications
- Optional sliding mech. for maintenance doors
- Galvanized inner sheets
- Painted external sheets
- 40mm rockwool insulated panel construction w.o. profiles
- Minimum 80% thermal efficiency acc. to EN308
- Eurovent certified internal components
- BMS via Modbus or BACnet
- Special selection software

Control Points

- Integrated control equipments are standard
- Proportional bypass control
- Outdoor dampers are option
- Free-heating/cooling
- Standard frost protection for HEX
- 4 different mode available
 - Standard
 - CO2
 - Duct Pressure
 - Constant Airflow for both stream
 - Constant AF + CO2

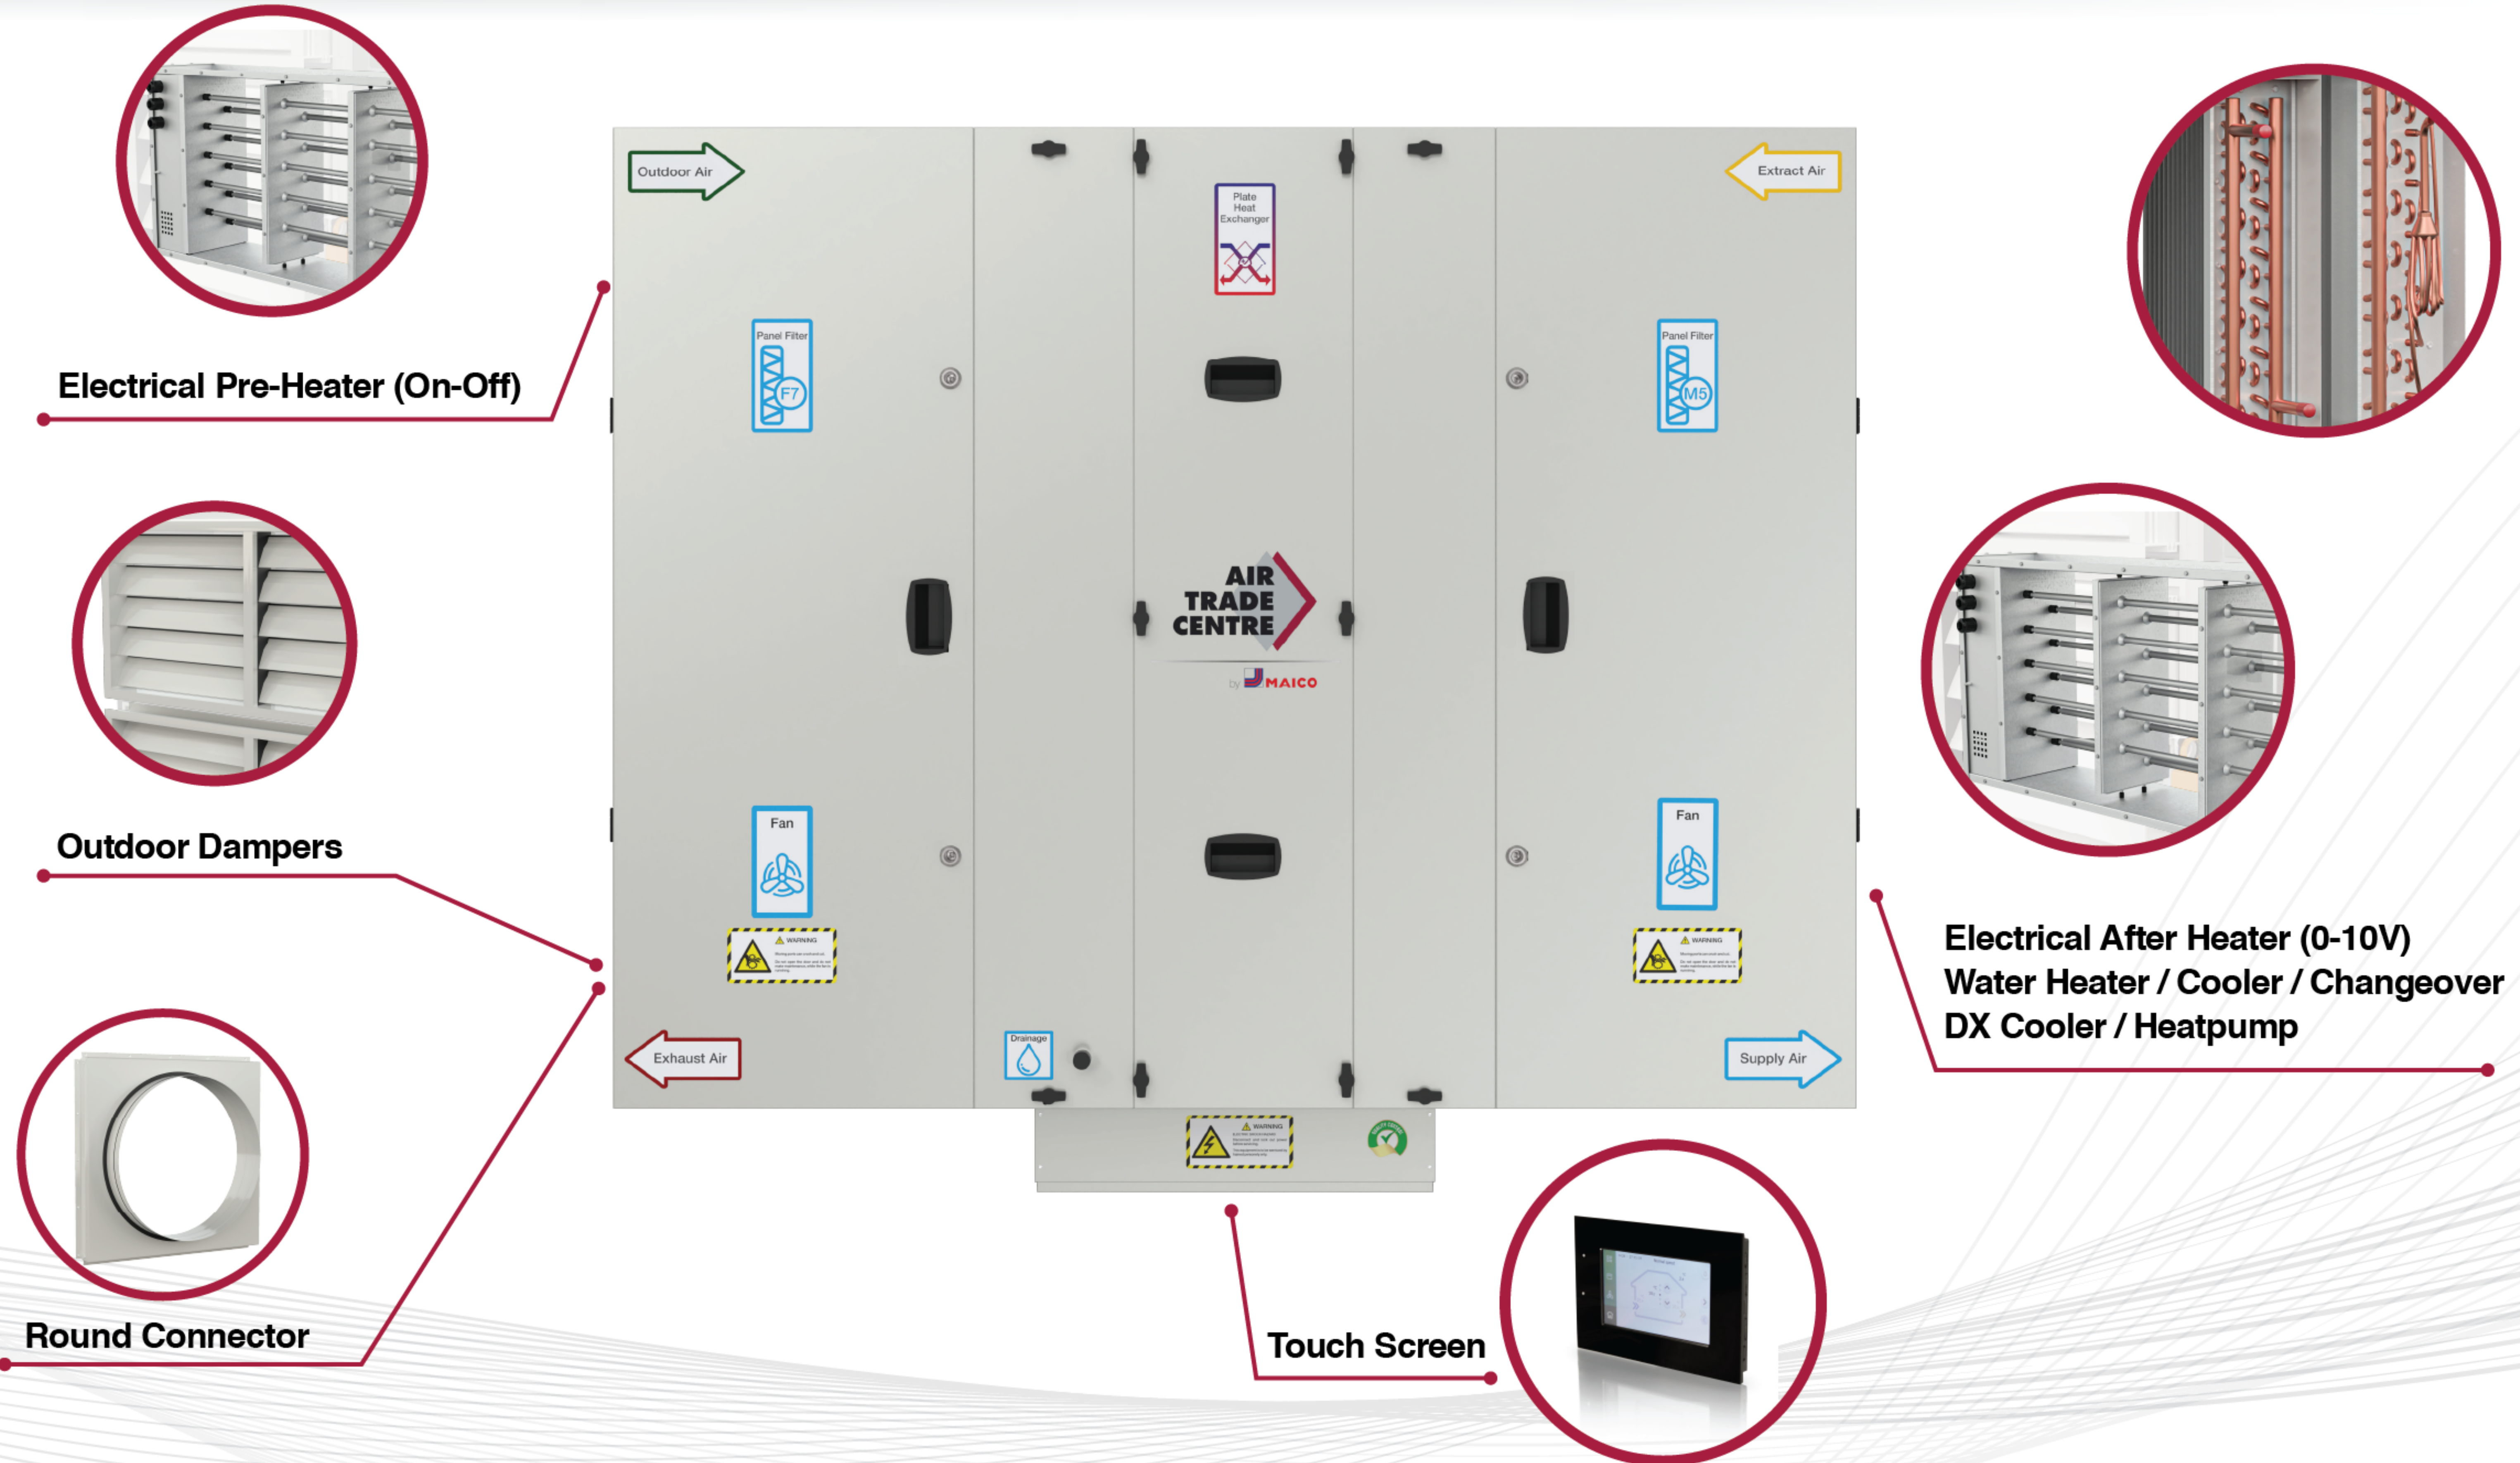

Electrical Pre-Heater (On-Off)

Outdoor Dampers

Round Connector

**Electrical After Heater (0-10V)
Water Heater / Cooler / Changeover
DX Cooler / Heatpump**

Touch Screen